


ADSB LED

Luminaria estanca led para salas limpias
Luminaire étanches led
Led waterproof light fitting

ADSB54 LED



Placa rígida led de alta eficiencia
Module led haute efficacité
High efficiency led module

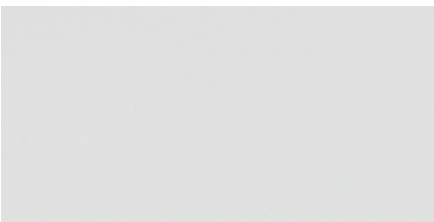

Óptica semiopal para una óptima distribución lumínica
Diffuseur semiopaque avec haute homogénéité
High homogeneity semiopal diffuser



	Mod.	P (W)	Dim. (mm) (B x A)	□/L (mm)	Lm (i)	T (°K)	Driver
ILC21.01.0.14	600 x 600	40	597 x 597	575 x 575	5.800	4.000	ON/OFF
ILC21.02.0.14	1.200 x 300	40	1.197 x 297	1.175 x 275	5.800	4.000	ON/OFF
ILC21.03.0.14	1.200 x 600	80	1.197 x 597	1.175 x 575	11.600	4.000	ON/OFF
ILC21.01.8.14	600 x 600	40	597 x 597	575 x 575	5.800	4.000	DALI/PULS
ILC21.02.8.14	1.200 x 300	40	1.197 x 297	1.175 x 275	5.800	4.000	DALI/PULS
ILC21.03.8.14	1.200 x 600	80	1.197 x 597	1.175 x 575	11.600	4.000	DALI/PULS
ILC21.01.7.14	600 x 600	40	597 x 597	575 x 575	5.800	4.000	DIM 1-10V
ILC21.02.7.14	1.200 x 300	40	1.197 x 297	1.175 x 275	5.800	4.000	DIM 1-10V
ILC21.03.7.14	1.200 x 600	80	1.197 x 597	1.175 x 575	11.600	4.000	DIM 1-10V
ILC21.01.0.13	600 x 600	40	597 x 597	575 x 575	5.800	3.000	ON/OFF
ILC21.02.0.13	1.200 x 300	40	1.197 x 297	1.175 x 275	5.800	3.000	ON/OFF
ILC21.03.0.13	1.200 x 600	80	1.197 x 597	1.175 x 575	11.600	3.000	ON/OFF
ILC21.01.8.13	600 x 600	40	597 x 597	575 x 575	5.800	3.000	DALI/PULS
ILC21.02.8.13	1.200 x 300	40	1.197 x 297	1.175 x 275	5.800	3.000	DALI/PULS
ILC21.03.8.13	1.200 x 600	80	1.197 x 597	1.175 x 575	11.600	3.000	DALI/PULS
ILC21.01.7.13	600 x 600	40	597 x 597	575 x 575	5.800	3.000	DIM 1-10V
ILC21.02.7.13	1.200 x 300	40	1.197 x 297	1.175 x 275	5.800	3.000	DIM 1-10V
ILC21.03.7.13	1.200 x 600	80	1.197 x 597	1.175 x 575	11.600	3.000	DIM 1-10V
ILC21.01.0.15	600 x 600	40	597 x 597	575 x 575	5.800	5.000	ON/OFF
ILC21.02.0.15	1.200 x 300	40	1.197 x 297	1.175 x 275	5.800	5.000	ON/OFF
ILC21.03.0.15	1.200 x 600	80	1.197 x 597	1.175 x 575	11.600	5.000	ON/OFF
ILC21.01.8.15	600 x 600	40	597 x 597	575 x 575	5.800	5.000	DALI/PULS
ILC21.02.8.15	1.200 x 300	40	1.197 x 297	1.175 x 275	5.800	5.000	DALI/PULS
ILC21.03.8.15	1.200 x 600	80	1.197 x 597	1.175 x 575	11.600	5.000	DALI/PULS
ILC21.01.7.15	600 x 600	40	597 x 597	575 x 575	5.800	5.000	DIM 1-10V
ILC21.02.7.15	1.200 x 300	40	1.197 x 297	1.175 x 275	5.800	5.000	DIM 1-10V
ILC21.03.7.15	1.200 x 600	80	1.197 x 597	1.175 x 575	11.600	5.000	DIM 1-10V

Dim.

