



COVER

Luminaria led de empotrar polivalente con alto confort visual y bajo deslumbramiento (UGR<19)

Luminaire led à encastrer à optique antiblousissement (UGR<19)
Led recessed light fitting with antiglaring optics (UGR<19)



Óptica de alto confort visual y bajo deslumbramiento, UGR<19.
AntiGlaring Optics
Optique antiblousissement (UGR<19). AntiGlaring Optics
Antiglaring optics (UGR<19). AntiGlaring Optics

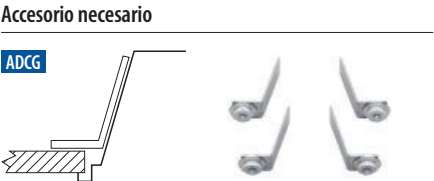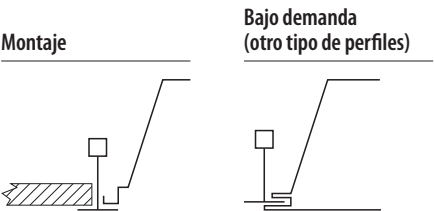


	Mod.	P (W)	Dim. (mm) (B x A)	□/△ (mm)	Lm (i)	T (°K)	Driver
ILC10.01.0.14	600 x 600	37	597 x 597	575 x 575	5.300	4.000	ON/OFF
ILC10.02.0.14	1.200 x 300	37	1.197 x 297	1.175 x 275	5.300	4.000	ON/OFF
ILC10.03.0.14	1.200 x 600	74	1.197 x 597	1.175 x 575	10.600	4.000	ON/OFF
ILC10.01.8.14	600 x 600	37	597 x 597	575 x 575	5.300	4.000	DALI/PULS
ILC10.02.8.14	1.200 x 300	37	1.197 x 297	1.175 x 275	5.300	4.000	DALI/PULS
ILC10.03.8.14	1.200 x 600	74	1.197 x 597	1.175 x 575	10.600	4.000	DALI/PULS
ILC10.01.7.14	600 x 600	37	597 x 597	575 x 575	5.300	4.000	DIM 1-10V
ILC10.02.7.14	1.200 x 300	37	1.197 x 297	1.175 x 275	5.300	4.000	DIM 1-10V
ILC10.03.7.14	1.200 x 600	74	1.197 x 597	1.175 x 575	10.600	4.000	DIM 1-10V
ILC10.01.0.13	600 x 600	37	597 x 597	575 x 575	5.300	3.000	ON/OFF
ILC10.02.0.13	1.200 x 300	37	1.197 x 297	1.175 x 275	5.300	3.000	ON/OFF
ILC10.03.0.13	1.200 x 600	74	1.197 x 597	1.175 x 575	10.600	3.000	ON/OFF
ILC10.01.8.13	600 x 600	37	597 x 597	575 x 575	5.300	3.000	DALI/PULS
ILC10.02.8.13	1.200 x 300	37	1.197 x 297	1.175 x 275	5.300	3.000	DALI/PULS
ILC10.03.8.13	1.200 x 600	74	1.197 x 597	1.175 x 575	10.600	3.000	DALI/PULS
ILC10.01.7.13	600 x 600	37	597 x 597	575 x 575	5.300	3.000	DIM 1-10V
ILC10.02.7.13	1.200 x 300	37	1.197 x 297	1.175 x 275	5.300	3.000	DIM 1-10V
ILC10.03.7.13	1.200 x 600	74	1.197 x 597	1.175 x 575	10.600	3.000	DIM 1-10V
ILC10.01.0.15	600 x 600	37	597 x 597	575 x 575	5.300	5.000	ON/OFF
ILC10.02.0.15	1.200 x 300	37	1.197 x 297	1.175 x 275	5.300	5.000	ON/OFF
ILC10.03.0.15	1.200 x 600	74	1.197 x 597	1.175 x 575	10.600	5.000	ON/OFF
ILC10.01.8.15	600 x 600	37	597 x 597	575 x 575	5.300	5.000	DALI/PULS
ILC10.02.8.15	1.200 x 300	37	1.197 x 297	1.175 x 275	5.300	5.000	DALI/PULS
ILC10.03.8.15	1.200 x 600	74	1.197 x 597	1.175 x 575	10.600	5.000	DALI/PULS
ILC10.01.7.15	600 x 600	37	597 x 597	575 x 575	5.300	5.000	DIM 1-10V
ILC10.02.7.15	1.200 x 300	37	1.197 x 297	1.175 x 275	5.300	5.000	DIM 1-10V
ILC10.03.7.15	1.200 x 600	74	1.197 x 597	1.175 x 575	10.600	5.000	DIM 1-10V

ES Luminaria fabricada en chapa de acero, termoesmaltada en color blanco calidad poliéster (otros colores RAL bajo demanda).
Montaje para una amplia gama de tipos de techo.
Cuando el montaje sea para techo liso, será necesario un conjunto de garras (ADCG) para sujetar la luminaria y regular la altura que se precise.
El componente óptico, que va conectado a tierra mediante un latiguillo, se adapta a la luminaria mediante muelles, haciendo posible su abatimiento para labores de mantenimiento de la luminaria.

FR Luminaire en tôle d'acier, recevant un revêtement émaillé blanc (autres couleurs RAL sur demande).
À encastrer dans plusieurs types de plafond.
Pour les plafonds en plâtre, l'appareil est fixé à l'aide de chevilles réglables.
À commander séparément (ADCG).
Fixation de l'optique, qui est reliée à la terre par un raccordement permettant le basculement et la sujétion au caisson pendant les opérations d'entretien.

EN Luminaire made of sheet steel coated with white quality polyester (other RAL colors on request).
Ready to be mounted on a wide range of ceilings.
When it is needed, in plaster ceilings, it is supplied under request a kit of brackets to install the luminaire (ADCG).
The louve, which is connected to ground through a wire, is joint by springs to the luminaire, ready to maintenance duties.

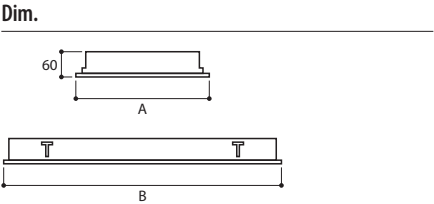

Sensores

